


TS-0221 Fully digital conference system of multi function expansion box

Features

1. Unique design.
2. With the expansion of the network function.
3. With power supply function.
4. With one input and three outputs, realize the network function, with communication instructions.
5. Can connect the host, realize network function.
6. Adopt 100M network transmission, and can realize hand in hand cascade.
7. Three exchange controller port, SSRAM, 10/100M Ethernet port, each interface supports IEEE802.3, IEEE802.3u, IEEE802.3x standard, has strong anti interference ability.

Function Introduction

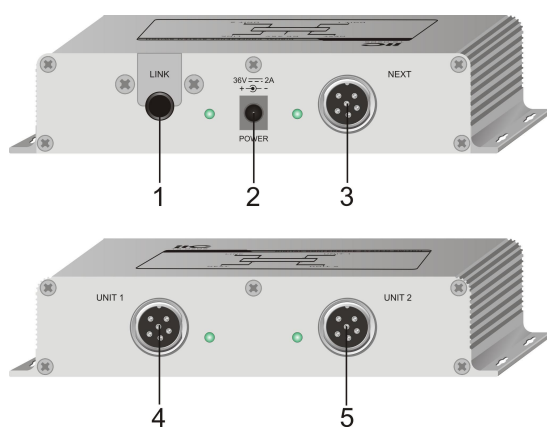

1. LINK— Connect TS-0200M conference system controller or connect an extension box NEXT interface.
2. Power input interface, DC 36V input.
3. NEXT—Used to connect to the next multi-function expansion box.
- 4&5. Connect TS-0206/TS-0206A.

Note: LINK port for connect TS-0200M DELEGATES interface or another TS-0221 port, port NEXT/ UNIT1/ UNIT2 can be used to TS-0206/TS-0206A or another TS-0221 devices. Please refer to the system diagram, take TS-0221 port LINK for TS-0200M DELEGATES of the mouth, the LINK status indicator light will keep flashing green after the network connection is normal; Port NEXT/ UNIT1 / UNIT2 state of light is the same. When no external 36V power supply, a TS-0200M host most can connect to 48 units of TS-0221, after the external DC 36V power supply, quantity can support the maximum number of units.

Specifications

Model	TS-0221
Maximum power consumption	1.5W
Supply Voltage	36V
Connection	Dedicated cable (6-pin)
Color	Silver
Weight	About 0.5Kg
Size(L*W*H)	156 x 111 x 32mm
Working Temperature	-10°C~+60°C
Working Humidity	20% to 80% relative humidity, non-condensing